


OM

OMTRACK ULISSE TK096 F



LISTA COMPONENTI MACCHINA
LISTE DER MASCHINENERSATZTEILE
MACHINE SPARE PARTS LIST
LISTE DES COMPOSANTS DE LA
MACHINE

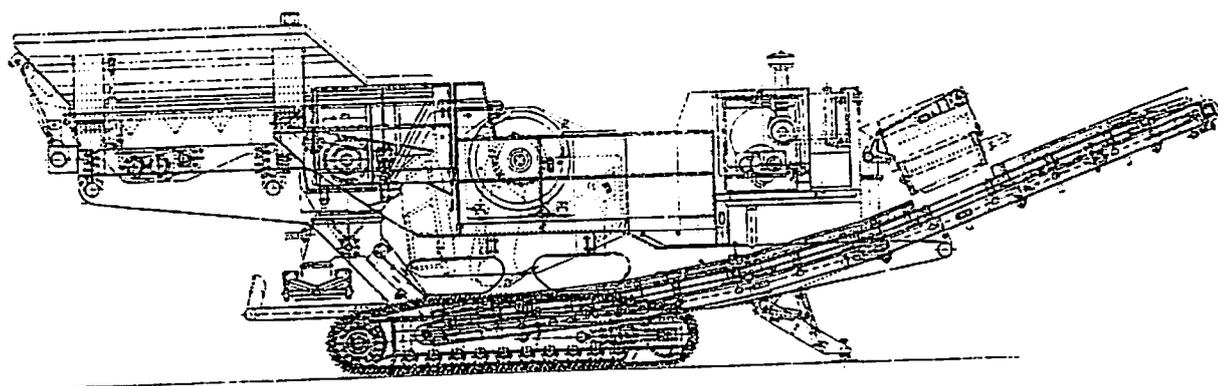

OFFICINE MECCANICHE
DI PONZANO VENETO S.P.A.

4. INFORMAZIONI TECNICHE

4.1. USO PREVISTO DELLA MACCHINA

IMPORTANTE : *La macchina è stata progettata, costruita e protetta solamente per la frantumazione di materiali inerti.*

Essa è particolarmente adatta per riciclare il materiale proveniente da demolizioni.

4.2. COMPOSIZIONE

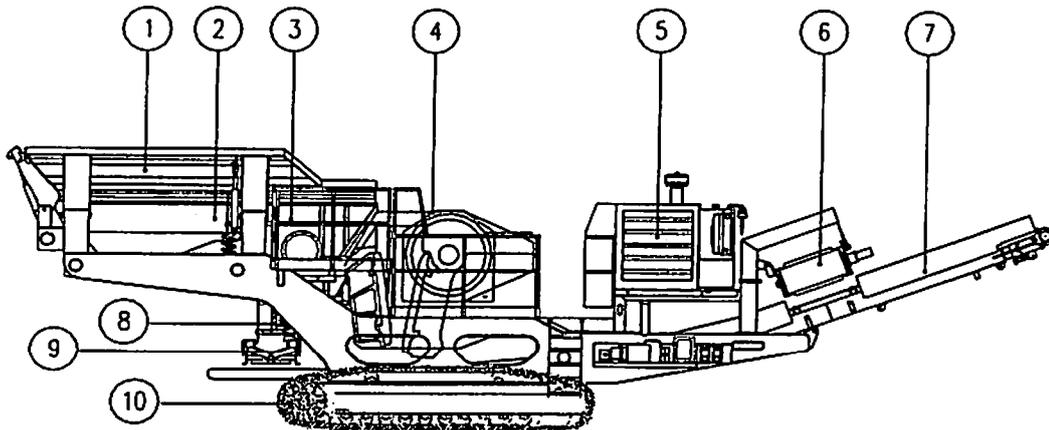


Figura n° 8 Composizione della macchina

1. Tramoggia di carico
2. Alimentatore vibrante
3. Vaglio
4. Frantoio a mascelle
5. Motore diesel
6. Separatore magnetico
7. Nastro trasportatore principale
8. Nastro trasportatore reversibile
9. Nastro laterale
10. Cingoli

SCALPER K3

3-WAY-SPLIT





CITTA' METROPOLITANA DI VENEZIA
Protocollo Arrivo N. 15757/2026 del 10-03-2026
Allegato 3 - Class. 12.3.0 - Copia Del Documento Firmato Digitalmente



DIMENSIONS

OPERATION:

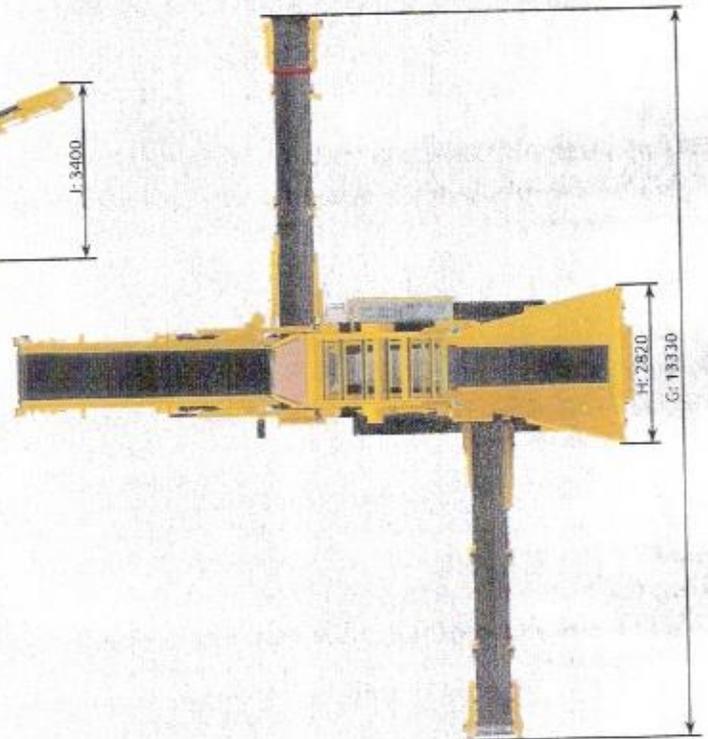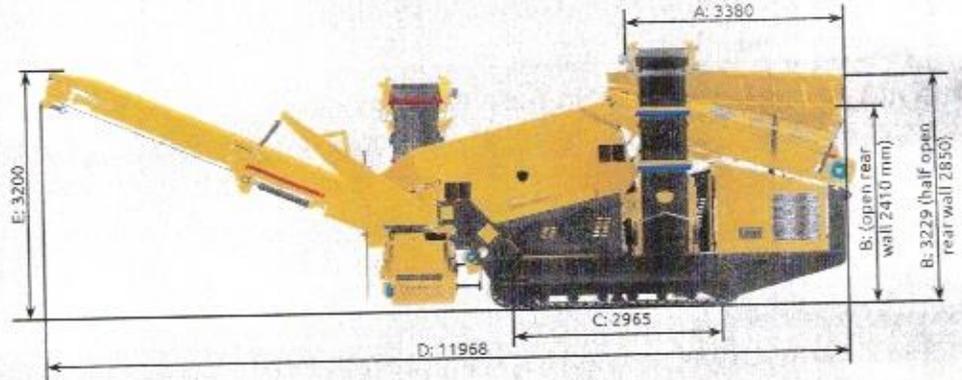

Weight: approx. 18,8 t (without options)

Weight options:

- Magnetic separator MCL 10 KT FE + approx. 889 kg
- Hopper wall extension + approx. 400 kg

Transport width

2.550 mm (8'4")

TRANSPORT:




REMARK: All pictures might show options, not included in the scope of supply

A	B	C	D	E	F	G	H	I	J	K	L	M
3380	3229	2965	11869	3200	3280	13330	2820	2550	3400	9800	3120	1140
11'1"	10'7"	9'9"	38'11"	10'6"	10'9"	43'9"	9'3"	8'4"	11'2"	32'2"	10'3"	3'9"

TECHNICAL SPECIFICATION


1) FEED HOPPER

- Content	3,5 m ³	(4,6 yard ³)
- Design	Wear resistant steel HB 450	
- Feeding height	min. 2.410 mm	(7'11")
- Feeding width	2.820 mm	(9'3")
- Feeding length lateral	3.380 mm	(11'1")
- Hopper walls	All three hopper walls are folding hydraulic	

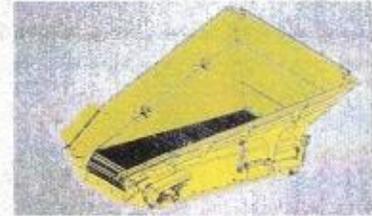

2) PLATE APRON FEEDER

- Model	31 APR 350-00	
- Full adjustable speed	0 - 4,8 m/min	(0-16 ft/min)
- Axle distance	3.150 mm	(10'4")
- Plate width	1.000 mm	(3'3")
- Drive	Hydraulic with gearbox 5 kW	(7,5 hp)
- Feed capacity	250 t/h	

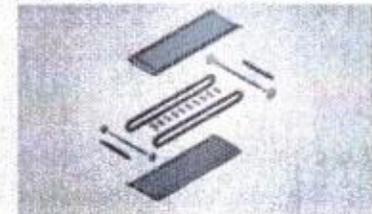

3) DOUBLE DECK SCREEN

- Model	31 SCR 200-00	
- Length x width	2.700 mm x 1.200 mm	(8'10" x 4'0")
- Effective screen area	Top deck 3,24 m ² Bottom deck 3,24 m ²	
- Top deck screens	1 pcs. end tensioned	
- Bottom deck screens	2 pcs. end tensioned	
- Drive	Hydraulic 7,5 kW	(10,2 hp)



4) UNDERSCREEN CONVEYOR

- Model	31 USC 200-00	
- Length	3.000 mm	(9'10")
- Width	800 mm	(2'7")
- Drive	4 kW hydraulic motor	(5,5 hp)
- Rubber belt quality	EP 400/3 4+2 Grade N1	
- Return drum	life time lubricated	



5) OVERSIZE BELT CONVEYOR

- Model	31 MCL 00-00	
- Length	5.000 mm	(16'5")
- Width	1.000 mm	(3'3")
- Drive	Hydraulic 5,5 kW	(7,5 hp)
- MCL speed	0-0,85 m/s	
- Rubber belt quality	EP 630/4 6+2 Option: p/n 609178	(CHEVRON W = 750 mm H = 25 mm)
- Return drum	life time lubricated	
- Transport	Hydraulically fold-able	
- Stockpile volume	Approx. 100 t; $\gamma=1,7$; 37° angle of repose	



TECHNICAL SPECIFICATION

6) STOCKPILE BELT CONVEYOR LEFT (FINE FRACTION)

- Model	31 LSL 300-00-H (can be mounted also right sided)	
- Length	8.000 mm	(26'3")
- Width	650 mm	(2'2")
- Drive	Hydraulic 7,5 kW	(11 hp)
- Rubber belt quality	EP 400/3 3+1,5 Grade N17	
- Return drum	life time lubricated	
- Transport	Hydraulically fold-able	
- Stockpile volume	Approx. 110 t ($\gamma=1,7$; 37° angle of repose)	



7) STOCKPILE BELT CONVEYOR RIGHT (MIDDLE FRACTION)

- Model	31 RSL 300-00-H (can be mounted also left sided)	
- Length	8.000 mm	(27'2")
- Width	650 mm	(2'8")
- Drive	Hydraulic 5,5 kW	(7,5 hp)
- Rubber belt quality	EP 315/3 3+1,5 Chevron W=375 H=15 mm	
- Return drum	life time lubricated	
- Transport	Hydraulically fold-able	
- Stockpile volume	Approx. 120 t ($\gamma=1,7$; 37° angle of repose)	




8) TRACK - UNIT

- Model	31 TRA-400-00	
- Length	2.965 mm	(9'9")
- Width track shoe	400 mm	(1'4")
- Total width	2.320 mm	(7'7")
- 2 speed	1,1 km/h and 1,9 km/h	(0,7 / 1,2 mph)
- Drive	Hydraulic piston motor and planetary gears	



9) HYDRAULIC

Hydraulic main pump	Variable flow, swash plate pump load sense open loop circuit 75 ccm	
Max. flow	135 + 40 + 25 = 200 L/min	(53 gpm)
Max. pressure	265 bar	
Pump regulation	servo hydraulic load sensing regulation, pressure compensation, automatic flow optimizer	
Hydraulic pump II	Fixed flow 22 ccm gear pump (for LSC)	
Hydraulic pump III	Fixed flow 14 ccm gear pump (for USC)	
Hydraulic tank	220 l (plastic)	(58 gal)
Hydraulic oil filter	1 full flow filter in return line with integrated fine (p/n 101187) filter (10 μ m)	
Hydraulic oil cooler	Integrated compact cooler, with water and air cooling package	
Hydraulic valves	PVG 32 proportional 5 bank valve	

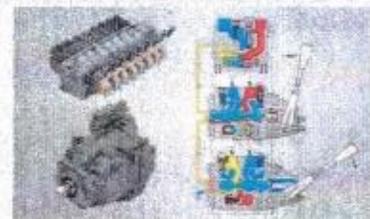

**With „Load sensing“ hydraulic pumps, the fuel consumption is reduced by
Approx. 20-25%, compared to standard gear pump and flow divider hydraulic systems.**



TECHNICAL SPECIFICATION

10) ENGINE UNIT

EU = Europe / US = United States
REM = ROW - Rest of World (except China and India)

Legend:
(a) = actual; (s) = standard; (o) = optional

- Model	31 ENU 330-00-H	
- Diesel engine type	a) DEUTZ TCD 2.9 L4 T5, 4 cylinder in-line (EU+US) - (s)	p/n 101323St5
	b) DEUTZ TCD 2.9 L4; 4 cylinder in-line (REM) - (s)	p/n 101322A
- Emission control	a) Tier 4f; EU STAGE V; DOC; DPF	
	b) Tier 4f; EU STAGE IIIB; DOC	
- Power acc. to ISO 14396	a + b) 45 kW @ 1.500 R.P.M.; 55 kW @ 1.800 R.P.M. (75 hp)	
- Max. torque	a + b) 300 Nm / 1.600 R.P.M.	(221 lbft)
- Engine speed	1.800 R.P.M.	
	Low engine speed for low fuel consumption	
- Bore/ Stroke	a + b) 92 / 110 mm	(3,7" x 4,3")
- Displacement	a + b) 2.920 cm ³	(178 cuin)
- Voltage	24 V (for improved cold start properties)	
- Battery	64035, 110 Ah-850 A	
- Electrical starter	3,5 kW; 24 V	(4,8 hp)
- Alternator	28 V; 55 A	
- Engine Operation	4-stroke Diesel direct injection turbo-charged	
- Cooling	water-cooled	
- Pushing Fan	550 diameter	
- Air Cleaner	dry type air-cleaner with cyclone pre-cleaner primary and safety elements	
- Fuel tank	280 litres (plastic)	(74 gal)
- Fuel pre-filter	with water separator	
- Fuel code	according to EN 590	
- Fuel Consumption	a + b) 210 g/kWh / 1.800 R.P.M. (typical 6 - 8 l/h)	

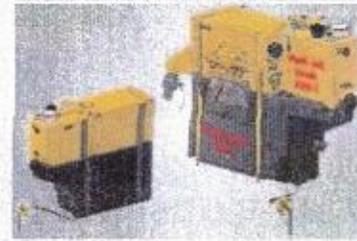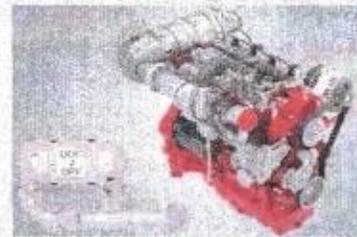


ATTENTION

Engine warranty expires in case non genuine Keestrack filters are used!

11) CONTROL

- Type	PLC – IP 67; dust and vibration proof
- Display	LCD screen 3,5"
- Operation	Control panel
	Wired hand remote controller; or optional Radio remote controller (see option list)
- Controller	
- Temperature control of hydraulic oil	> 83° C protection; first feeder stops, later engine stops
- Diesel fuel tank level sensor	First low level warning, then feeder stops, then engine stops
- Cold start protection	Below 0° C a warm-up is required
- Speed sensor for screenbox	Included

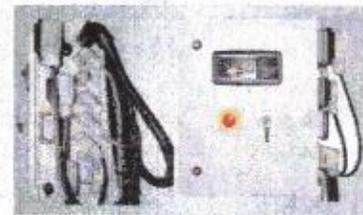


CITTA' METROPOLITANA DI VENEZIA
 Protocollo Arrivo N. 15757/2026 del 10-03-2026
 Allegato 3 - Class. 12.3.0 - Copia Del Documento Firmato Digitalmente

TECHNICAL SPECIFICATION - OPTIONS

12) DUST SUPPRESSION SYSTEM p/n 611980 (without pump)

- System	p/n X109589 low pressure	
- Spraying area	Main + left + right side conveyor + screen/APR	
- Drive	Hydraulic motor 1,1 kW	(1,5 hp)
- Water consumption	2 m ³ /h	
- Pressure	5 bar	
- Components	4 ball valves (all 4 spraying points can be opened / closed separately); 18 x nozzles 1,12 l/min; filter to customer's tank; hose reel with 20 m hose and pressure pistol	
- Weight	283 kg	(624 lb)

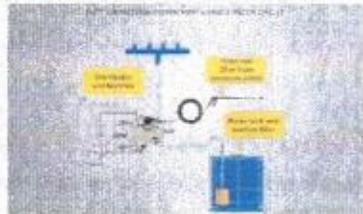

13) RADIO REMOTE CONTROL – Level 2

- Order no.	Remote 100450 Sticker 100355	
- Functions	- Tracks forwards / backwards with automatic speed control - Main belt conveyor start / stop and +/- - Side conveyor MCL start / stop and +/- - Apron feeder start / stop and +/- - Automatic start / stop - Machine stop button (blue) - Display	



14) WORKING LIGHTS

- Tower with 4 lamps	p/n 701006 LED lights 12/24 V; 45 W each lamp: 9 pcs. LED's (p/n 205147) 4500 Lumen	
- protection degree	IP69K	
- Weight	9 kg	(20 lb)



15) FUEL FILLING PUMP p/n 701030

- with automatic stop	p/n 701030	
- Weight	10 kg	(22 lb)
- Model	F 80-24-1"	
- Capacity	80 l/min	
- Filter	3 micron with water absorbent media	
- Suction hose	¾" 1,5 m long	
- Drive	On board-electric 24 V DC	



TECHNICAL SPECIFICATION - OPTIONS

16) ANTI CLOGGING SYSTEM p/n 102381

- Application To be used for bottom deck if the feed material is sticky and the deck is clogging
- Weight 15 kg (33 lb)



17) SCREEN FLOW BRAKE p/n 616765

- Application To increase the screening efficiency when screening round shaped material, this has bigger size than 200 mm and transferred to fast above the screen.
- Weight 136 kg (290 lb)



18) PICKING STATION

- Picking station application To take out pieces of wood and plastic from the demolition material
- Available parts
 - p/n 610429: left and right side; 260 kg (570 lb)
 - p/n 610427: right side; 130 kg (285 lb)
 - p/n 610428: left side; 130 kg (285 lb)
 - p/n 615671: preparation for picking station
- Adjustment speed MCL Either on RELYTEC panel or optional radio remote control Level 2 (p/n 100450)



19) Options LSL and USC

TUNGSTEN SCRAPERS

- Application For wet and sticky material
- Available parts
 - p/n 102289: Tungsten scraper LSL + USC
 - p/n 101560: Tungsten scraper USC
 - p/n 101953: Tungsten scraper LSL



20) BELT FEEDER p/n 612247

- Model 31 BFR 100-00-K12 (for feeding fine material)
- Full adjustable speed 0 - 4,8 m/min (0-16 ft/min)
- Axle distance 3.083 mm (10'4")
- Belt width 1.000 mm; EP 500/3 8+2 RIPSTOP (3'3")
- Drive Hydraulic with gearbox 5 kW (7,5 hp)
- Feed capacity 250 t/h
- Weight -1.325 kg (-2.800 lb)




TECHNICAL SPECIFICATION - OPTIONS

21) HEAT PROBE FOR HYDRAULIC OIL p/n 103614

(this option is only available together with the heating system p/n 203460)

- Type	HP 2024-ORB; Turbulated Immersion Heat Exchanger	
- Description	Multiple immersion tank heaters utilize hot coolant to keep bulk fluids warm	
- Order information	This heating system is available for the dieseltank and the hydraulic oil tank (order each extra!)	
- Insert length	610 mm	(24")
- Output at -30° C	3 kW	(4 hp)

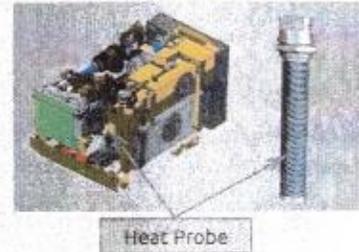

22) Option for ENGINE UNIT p/n 203460

HEATING SYSTEM FOR ENGINE	p/n 203460	
- Heating power	up to 9,1 kW;	(12 hp)
- Fuel consumption	0,19 - 1,1 l/h	
- Voltage / Watt	24V; 37-90 W	
- Operating temperature	-40°C - + 80°C	
- Weight	4,8 kg	(11 lb)
- Additional	Incl. timer for 3 starting times and temperature pre-selection	



TECHNICAL SPECIFICATION – SCREEN CHOICE

01) TOP DECK

PUNCHED PLATES

(feed size up to 400 mm)

p/n	Description
202382	TD CUTTED 40 mm - HB 450
202383	TD CUTTED 45 mm - HB 450
202384	TD CUTTED 50 mm - HB 450
202386	TD CUTTED 60 mm - HB 450
202387	TD CUTTED 65 mm - HB 450
202388	TD CUTTED 70 mm - HB 450
202390	TD CUTTED 80 mm - HB 450
202392	TD CUTTED 90 mm - HB 450
202380	TD CUTTED 100 mm - HB 450
202601	TD CUTTED 125 mm - HB 450
654933	TD CUTTED Front 125 mm - HB 450 Rear 150 mm - HB 450




WELDED WIRE MESH

p/n	Description
202296	TD WELDED 45 x 45 x 10 mm
202298	TD WELDED 55 x 55 x 12 mm
605234	TD WELDED 65 x 65 x 12 mm
202302	TD WELDED 80 x 80 x 12 mm



WOVEN WIRE MESH

p/n	Description
202228	TD MESH 16 x 16 x 3 mm
202175	TD MESH 20 x 20 x 4 mm
202417	TD MESH 25 x 25 x 5 mm
202418	TD MESH 30 x 30 x 5 mm
202093	TD MESH 35 x 35 x 7 mm
202245	TD MESH 40 x 40 x 5 mm
202247	TD MESH 50 x 50 x 8 mm
202246	TD MESH 45 x 45 x 8 mm
202248	TD MESH 55 x 55 x 9 mm
202250	TD MESH 60 x 60 x 9 mm
202252	TD MESH 70 x 70 x 9 mm
202254	TD MESH 80 x 80 x 12,5 mm

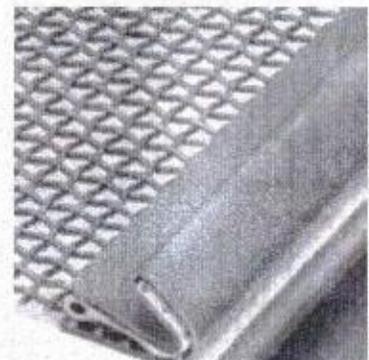

TECHNICAL SPECIFICATION – SCREEN CHOICE

01) TOP DECK


FINGER SCREENS

Finger dimensions $\varnothing 36 / \varnothing 17 \text{ mm} - 800 \text{ mm}$; p/n 101106

REMARK:

Finger openings average [mm]; Forged fingers; deviations are possible; measuring of opening is in the beginning of the second third of the length of the finger.

p/n	mm	Inch
202497	45	1 3/4"
202498	52	2"
202499	60	2 1/3"

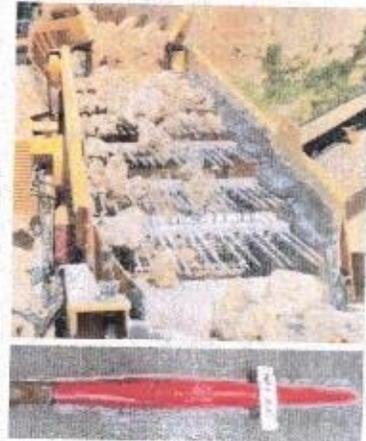


TECHNICAL SPECIFICATION – SCREEN CHOICE

02) BOTTOM DECK

FINGER SCREENS With PU base

p/n	Description
612737	Fingers-segment ø 10/ s=15 mm
612738	Fingers-segment ø 12/ s=20 mm
612739	Fingers-segment ø 12/ s=27 mm
612740	Fingers-segment ø 15/ s=30 mm
202506	Bottom deck finger deck cassette frame

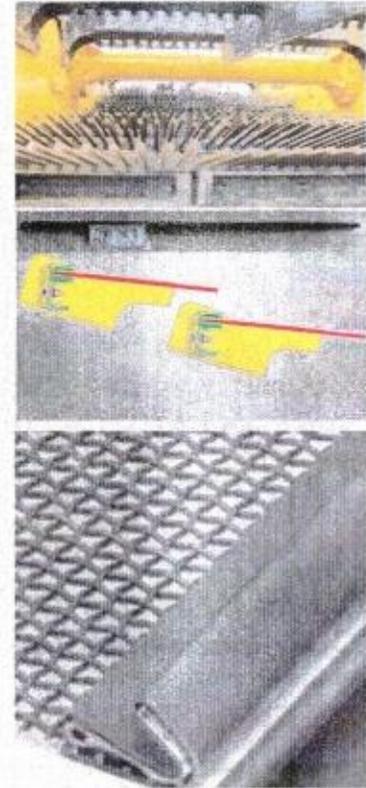


WOVEN WIRE MESH

p/n	Description
202055	BD MESH 2 x 2 x 1,25 mm
202227	BD MESH 3 x 3 x 2 mm
202425	BD MESH 4 x 4 x 2 mm
202231	BD MESH 6 x 6 x 2 mm
202180	BD MESH 8 x 8 x 2,5 mm
202137	BD MESH 10 x 10 x 3 mm
200225	BD MESH 12 x 12 x 3 mm
201996	BD MESH 15 x 15 x 3 mm
202341	BD MESH 16 x 16 x 3 mm
202522	BD MESH 18 x 18 x 4 mm
201998	BD MESH 20 x 20 x 4 mm
202528	BD MESH 22 x 22 x 4 mm
201997	BD MESH 25 x 25 x 5 mm
202157	BD MESH 30 x 30 x 5 mm
202131	BD MESH 35 x 35 x 7 mm
201995	BD MESH 40 x 40 x 8 mm
202449	BD MESH 45 x 45 x 8 mm
202143	BD MESH 50 x 50 x 8 mm
202256	BD MESH 55 x 55 x 10 mm
202058	BD MESH 60 x 60 x 8 mm
202647	BD MESH 70 x 70 x 10 mm

HARP SCREEN

- Advantages:
- high percentage of open screening area
 - less danger of clogging

p/n	Description
202404	BD HARP 3 x 200 x 1,2 mm
202405	BD HARP 4 x 200 x 1,2 mm
202191	BD HARP 6 x 200 x 2 mm
202158	BD HARP 8 x 200 x 2 mm
202336	BD HARP 10 x 100 x 2,5 mm
202188	BD HARP 10 x 200 x 2,5 mm
202179	BD HARP 12 x 200 x 2,5 mm
202150	BD HARP 15 x 200 x 3 mm
202473	BD HARP 18 x 100 x 3 mm
202545	BD HARP 20 x 100 x 4 mm
202207	BD HARP 20 x 200 x 4 mm
202209	BD HARP 25 x 200 x 4 mm
202210	BD HARP 30 x 200 x 5 mm

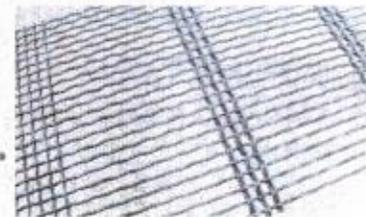

SERPA DIAMOND

202573	BD HARP- SERPA 6 x 200 x 2,5 mm
202264	BD HARP- SERPA 10 x 200 x 3 mm
202265	BD HARP- SERPA 12 x 200 x 3 mm
202266	BD HARP- SERPA 15 x 200 x 3 mm
202582	BD HARP- SERPA 16 x 120 x 3 mm

